

A

B

C

D

E


F

1

2

3

4

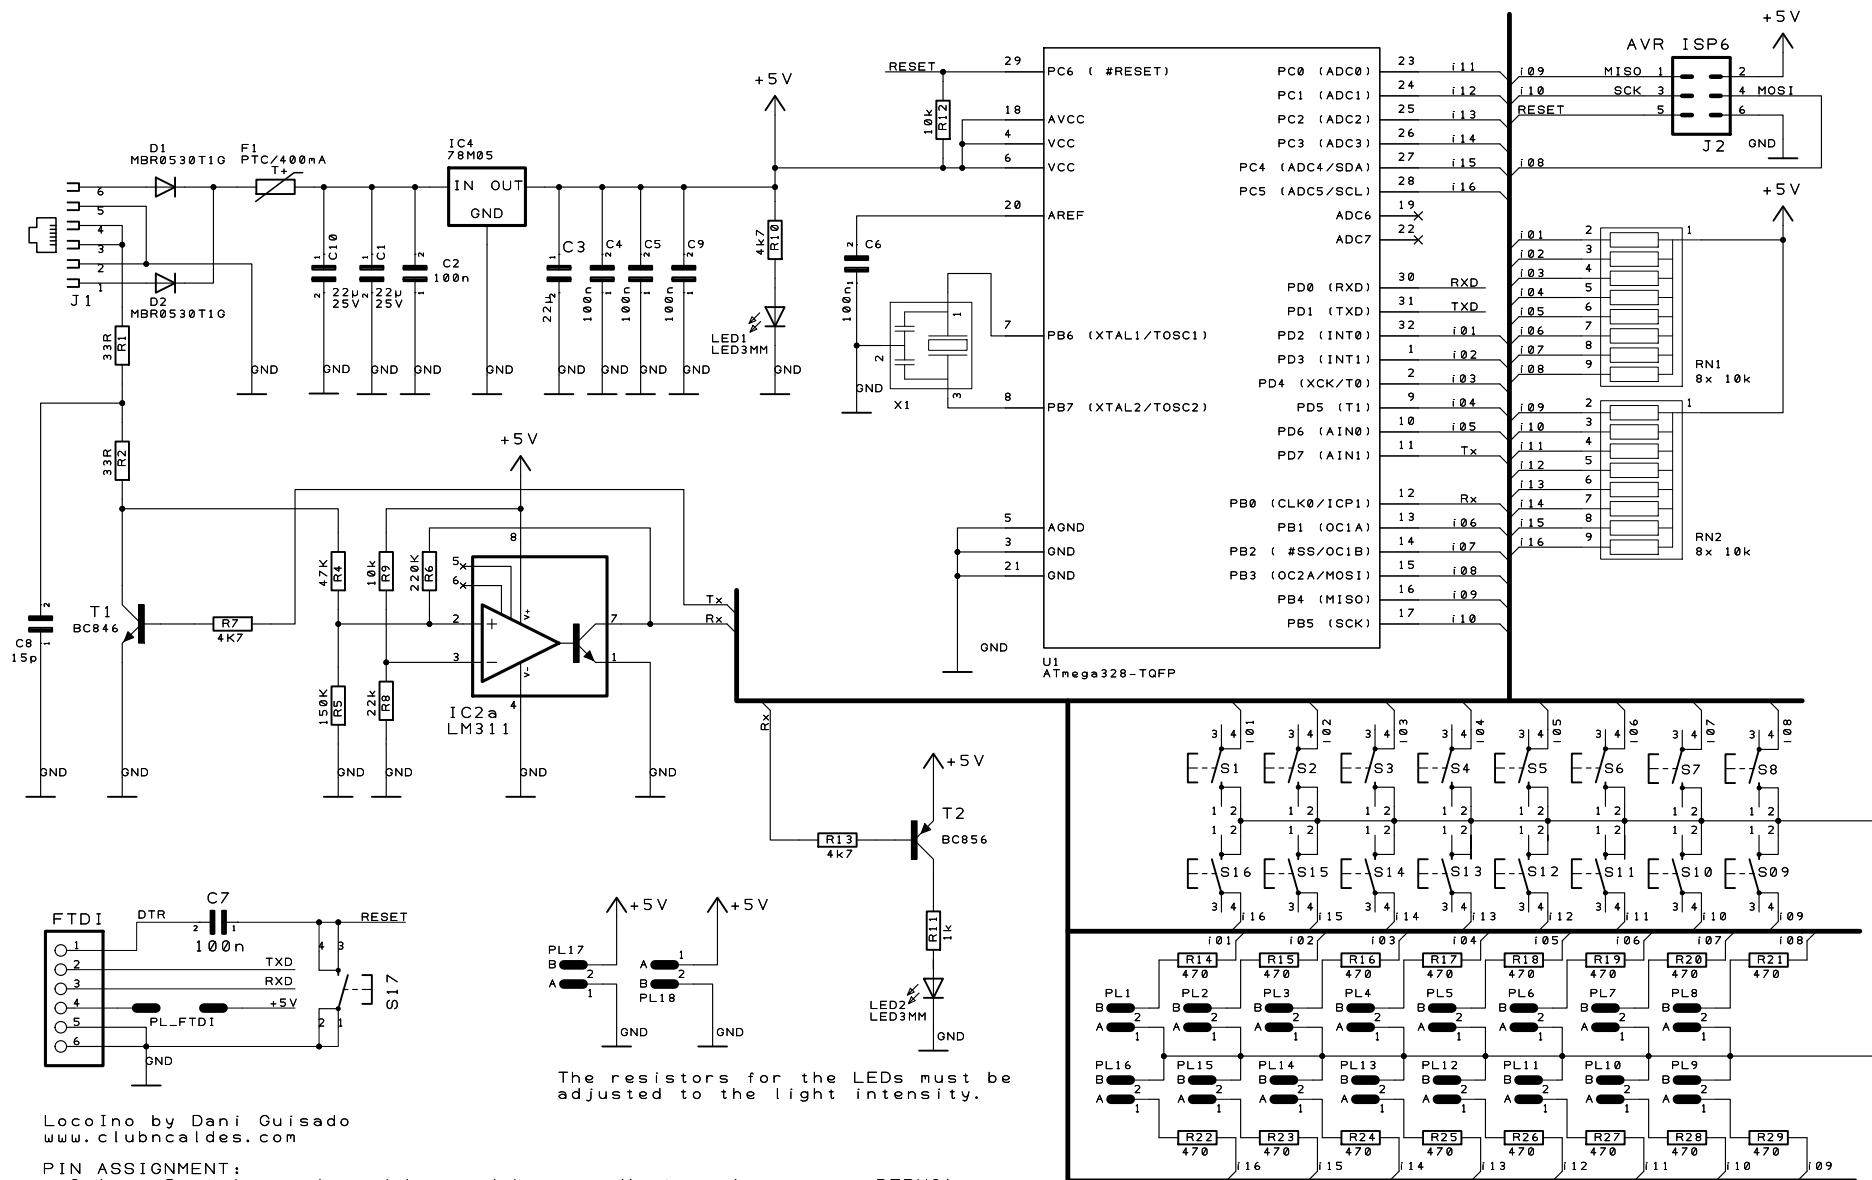

LocoIno by Dani Guisado
www.clubnrcalides.com

PIN ASSIGNMENT:

0.1 -> Serial, used to debug and LocoNet Monitor (uncomment DEBUG)
2,3,4,5,6 -> Configurable I/O from 1 to 5
7 -> LocoNet TX
8 -> LocoNet RX
9,10,11,12,13 -> Configurable I/O from 6 to 10
A0,A1,A2,A3,A4,A5 -> Configurable I/O from 11 to 16

The resistors for the LEDs must be adjusted to the light intensity.

Alternative assembly of push buttons or cable terminals

PROJECT: LocoNet Keypad/InOut with Arduino
DRAWING TITLE: LocoIO-A InOut
DRAWN BY: Sim&IT

REVISION: 1.5

SHEET: 1 OF 1

STATUS:

DATE: 01.07.2026