

A

B

C

D

E


F

1

2

3

4

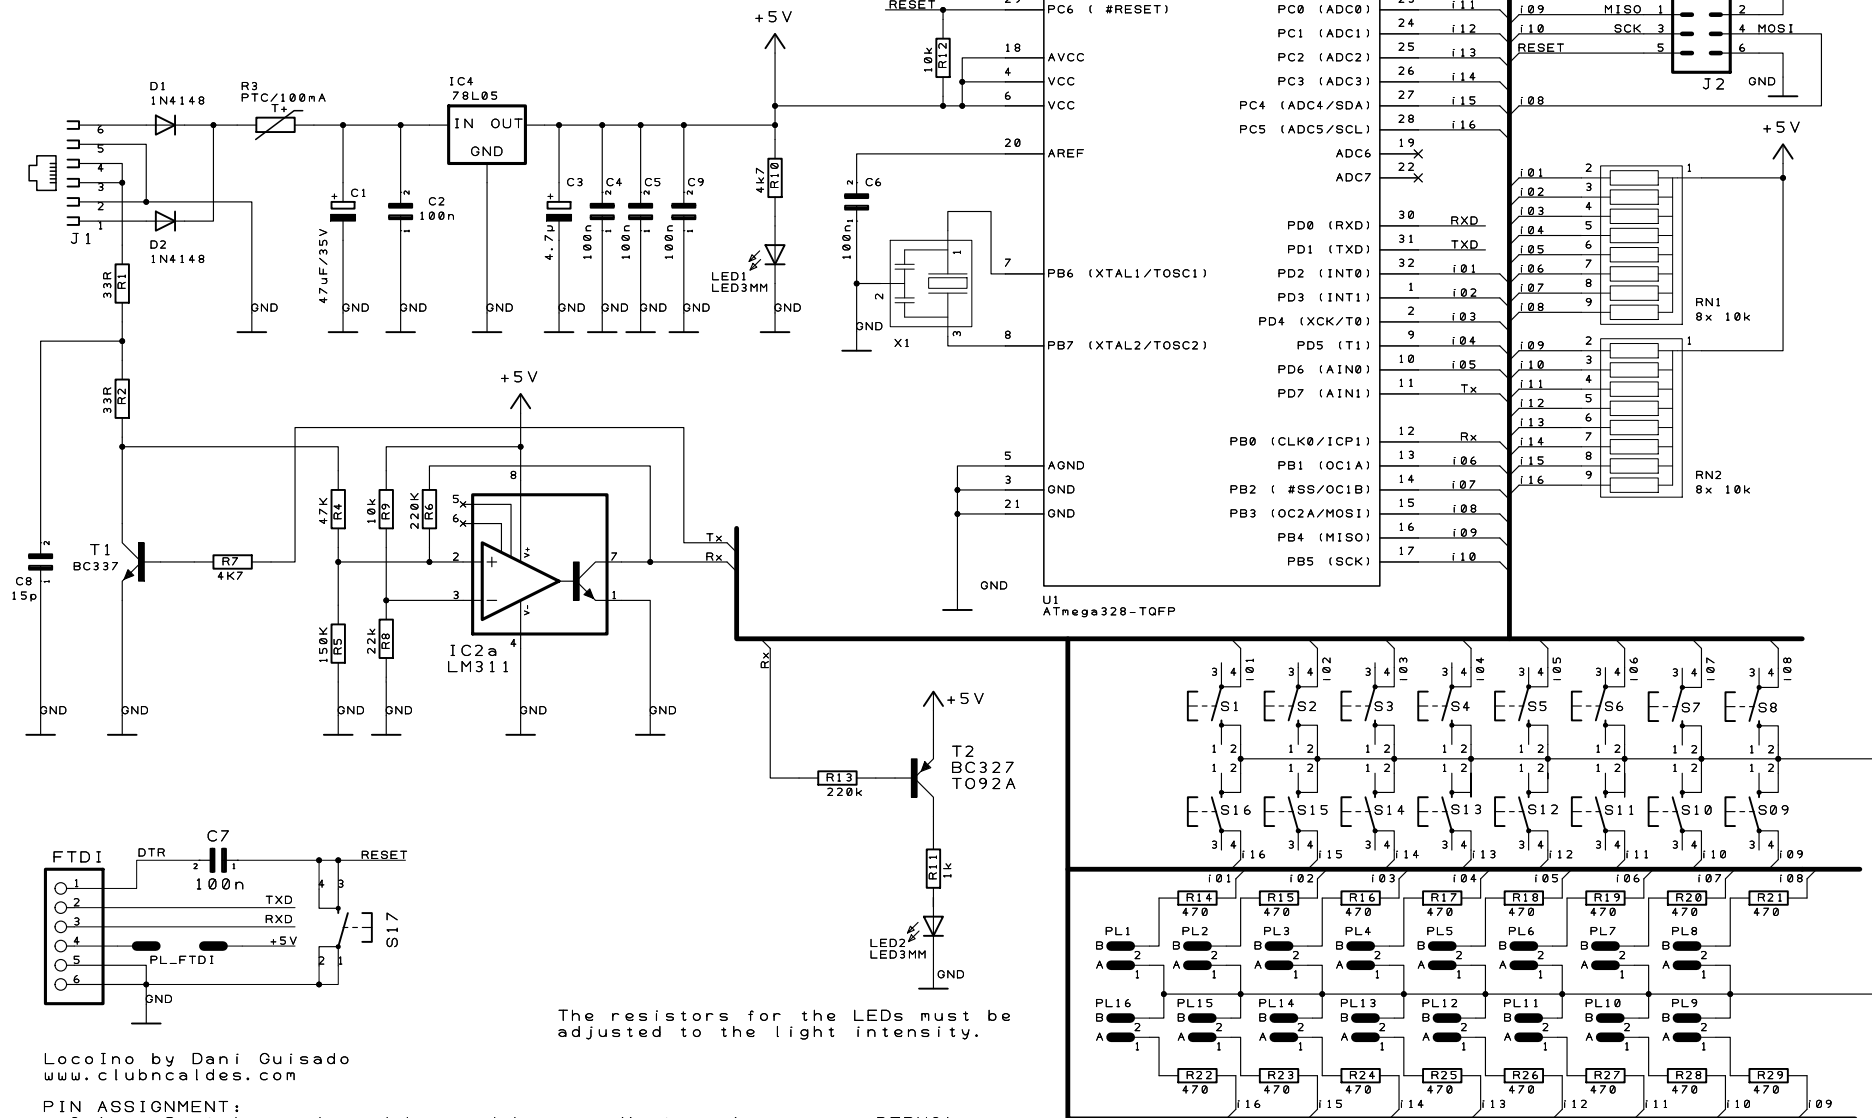

The resistors for the LEDs must be adjusted to the light intensity.

LocoIno by Dani Guisado
www.clubncalesdes.com

PIN ASSIGNMENT:

- 0,1 -> Serial, used to debug and LocoNet Monitor (uncomment DEBUG)
- 2,3,4,5,6 -> Configurable I/O from 1 to 5
- 7 -> LocoNet TX
- 8 -> LocoNet RX
- 9,10,11,12,13 -> Configurable I/O from 6 to 10
- A0,A1,A2,A3,A4,A5-> Configurable I/O from 11 to 16

Alternative assembly of push buttons or cable terminals

PROJECT: LocoNet Keypad/InOut with Arduino
DRAWING TITLE: LocoIO-A InOut
DRAWN BY: Sim&IT

REVISION: 1.4

SHEET: 1 OF 1

STATUS:

DATE: 14.01.2026